


# ComFlor<sup>®</sup> 225

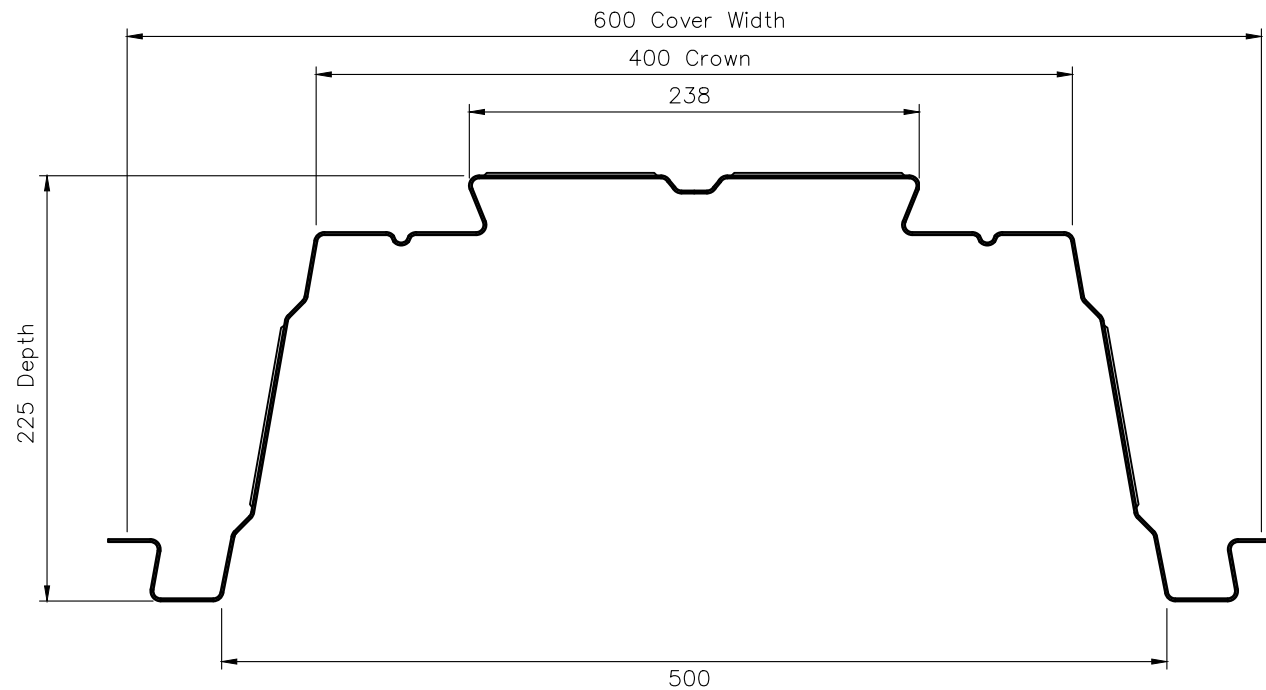

SECTION THROUGH PROFILE

Gauge (mm)	Substrate	Yield (N/mm <sup>2</sup> )	Available Coating Type		Minimum Length (mm)	Maximum Length (mm)
			Zinc*	MagiZinc <sup>®**</sup>		
1.25	Steel	350	Z 275	MZ 140, MZ 310	1500	10000

\* Zinc (Z) Coating only, minimum coating weight 275g/m<sup>2</sup> (total for both sides).

\*\* MagiZinc<sup>®</sup> MZ (ZM Zinc-Magnesium-Aluminium) Coating only, minimum coating weight 140g/m<sup>2</sup> and 310g/m<sup>2</sup> respectively (total for both sides).

NOTE: ComFlor<sup>®</sup> and MagiZinc<sup>®</sup> are registered trademarks of Tata Steel UK Limited.

All dimensions are to the intersections of profile elements and are measured in millimetres unless stated otherwise.

Manufactured to BS EN 10346

**Building Systems UK**

A Tata Steel enterprise

*Tata Steel UK Limited retain the right to amend the construction and technical specifications shown on this drawing without prior notice.*

SALES AND TECHNICAL OFFICE

Tata Steel  
Building Systems UK  
Shotton Works  
Deeside  
Flintshire  
CH5 2NH

TEL: 01244 89 2199

[www.tatasteelconstruction.com](http://www.tatasteelconstruction.com)

Title:

**ComFlor<sup>®</sup> 225**

Scale:  
1:4 @ A4

© Tata Steel UK Ltd.

Dwg. No.  
TS-001-CF225

Rev.  
01