



Tata Steel Profile - D137 Perforated

NOTE:

All dimensions are to the intersections of profile elements and are measured in millimetres unless stated otherwise

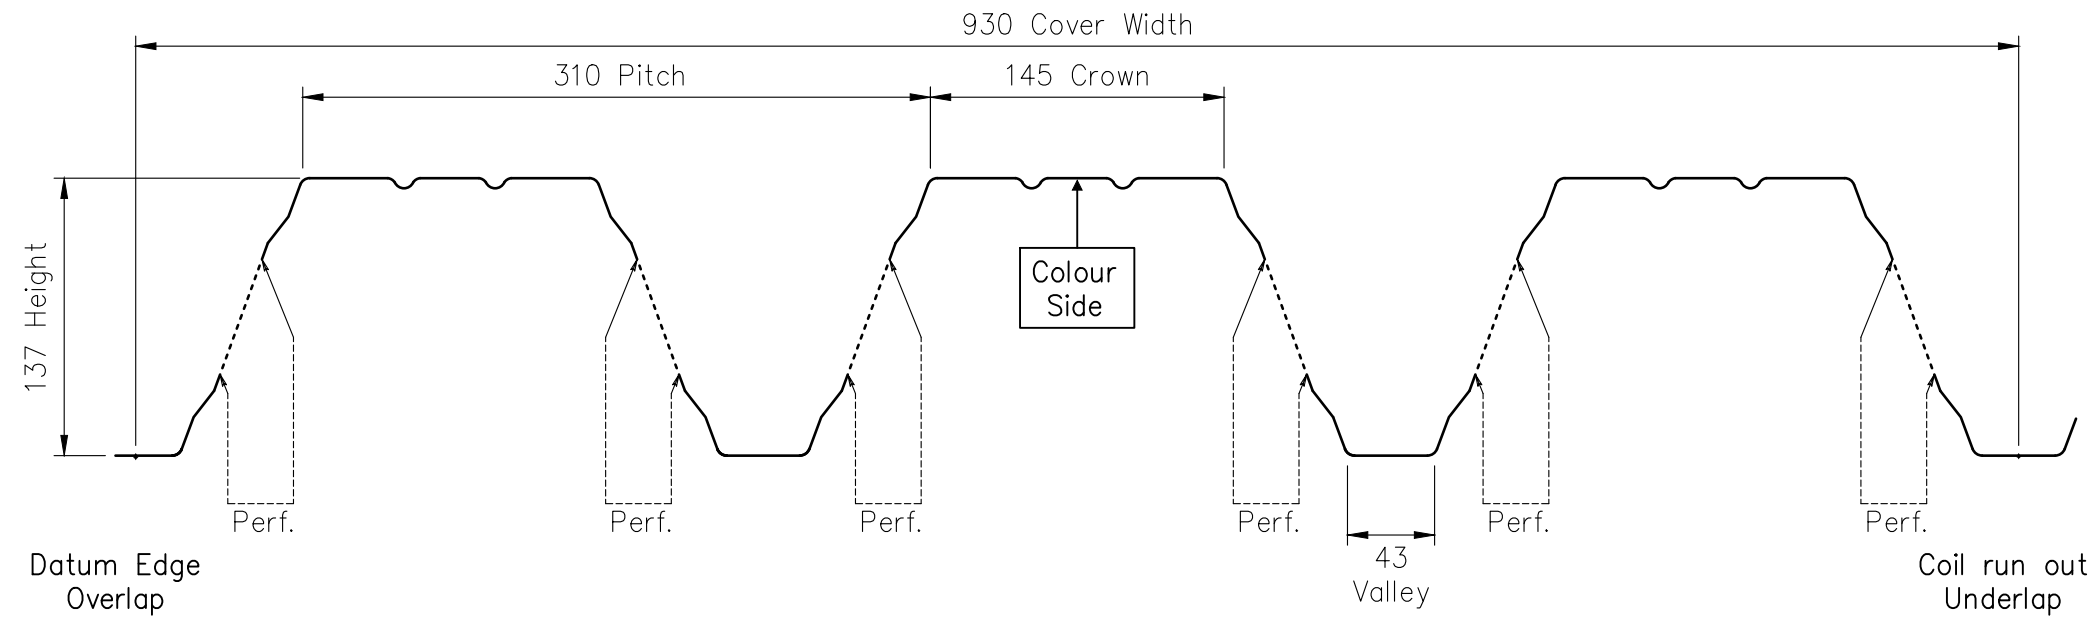


SECTION THROUGH PROFILE

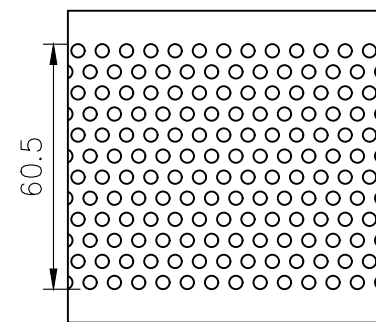

PERFORATIONS:
3mm Ø HOLES ON 6mm OFFSET PITCH

CROWN STIFFENER DETAIL

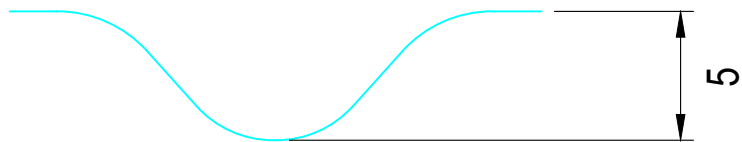

Gauge (mm)	Substrate	Available Coating Type			Minimum Length (mm)	Maximum Length (mm)
		Zinc*	MagiZinc [®] **	Colorcoat [®] PE15***		
0.90	Steel	Z 275	MZ 140	Interior Liner PE15	1000	12000
1.25	Steel	Z 275	MZ 140	Interior Liner PE15	1000	12000

* Zinc (Z) Coating only, minimum coating weight 275g/m2 (total for both sides).
** MagiZinc[®] MZ (ZM Zinc-Magnesium-Aluminium) Coating only, minimum coating weight 140g/m2 (total for both sides).
*** Colorcoat[®] PE15 uses Z 275 coated substrate.

Zinc, MagiZinc[®] and Colorcoat[®] PE15 coated products use 280MPa yield substrate.

RoofDek[®], Colorcoat[®] and MagiZinc[®] are registered trademarks of Tata Steel UK Limited.

Manufactured to BS EN 10346

Tata Steel Construction retain the right to amend the construction and technical specifications shown on this drawing without prior notice.

Building Systems UK
A Tata Steel enterprise

SALES AND TECHNICAL OFFICE
Shotton Works
Deeside
Flintshire
CH5 2NH
TEL: 01244 89 2199
www.tatasteelconstruction.com

TITLE

**D137 Decking Profile
- Perforated**

DRAWN BY
HW

SCALE
NTS

DATE
30.07.25

DRG. No. Rev.
TS000-06-137-P-A 01