




Fire rating - 18 mins insulation & 132 mins integrity

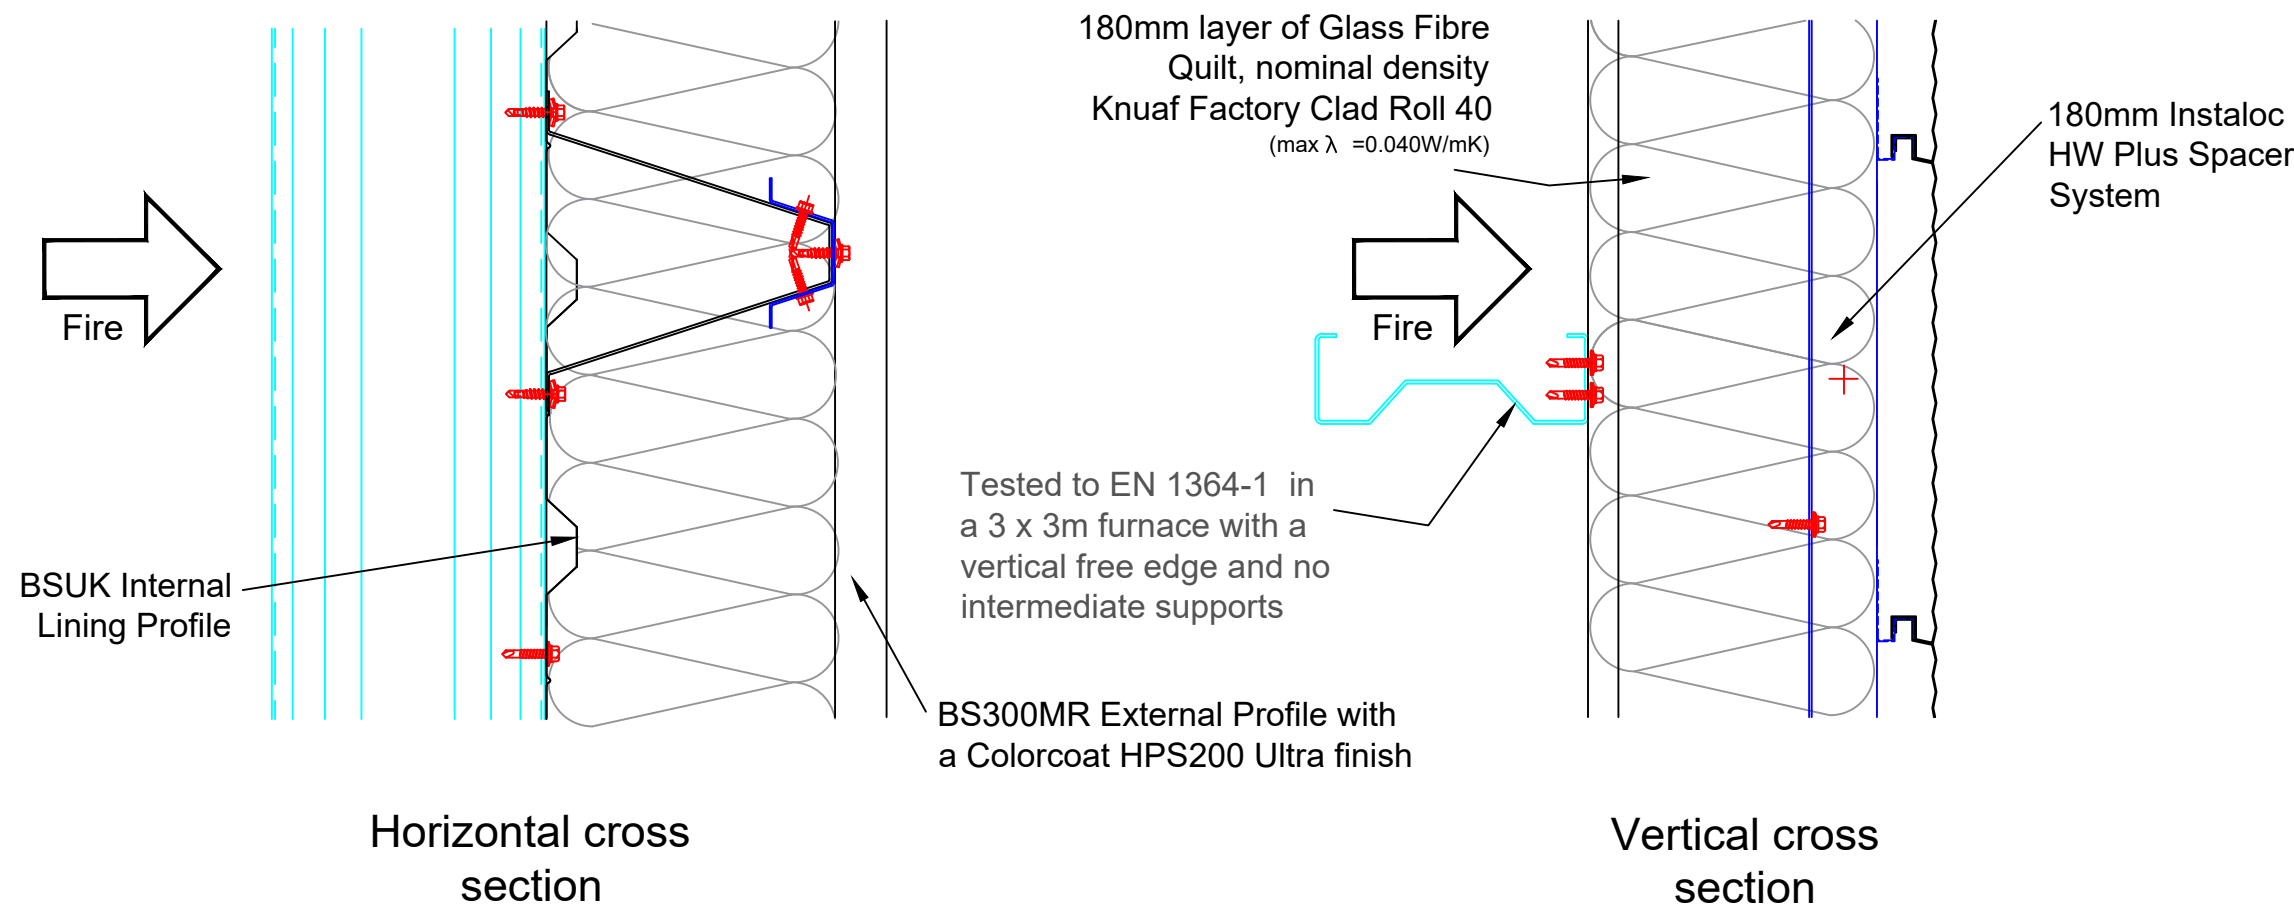

All support steelwork by others

TRISOBUILD™ U-VALUES

System as shown = 0.23 W/m²K

Fire performance ratings will be unaffected if deeper insulation and spacer brackets are used for lower U-value requirements

Building Systems UK
A Tata Steel enterprise

Technical Office - TEL : 01244 892199
www.buildingsystemsuk.co.uk

PROJECT

Typical Trisobuild
HW Details

TITLE

Trisobuild FW15 Fire wall

DRAWN BY

LK

SCALE

NTS

APPROVED BY

PS

TOLERANCES

DATE

17/01/25

DRG. No.

W1-001-03